

## Features



- Frosted lens to reduce glare
- Instant on to full brightness
- High efficacy at 103-108 lumens per watt
- Available 3500K, 4000K, and 5000K color temperatures
- Suitable for damp locations
- Operating temp -40°C - +60°C / -40°F - +140°F
- Superior heat management yields 60,000 hours life
- LM79/80 reports and TM21 data available
- Lower maintenance costs
- Dimensions 47.7" x 23.7" x 4.3"
- 0-10 V DC dimming standard

- UL, DLC, RoHS and FCC certified
- Ultra lightweight for easy installation
- Isolated type power driver is shock and fire resistant
- 7 year warranty
- Input Voltage 120-277V
- Workable Voltage 90-305V

## Applications

- Office
- Workshop
- Warehouse
- Indoor area lighting
- Healthcare Facilities
- Schools
- Retail stores

### Items Stocked in Illinois Warehouse


Model#	SKU	Lumens	CRI	Weight (lbs)	Color Temp (K)	Watts	Lumens Per Watt	IES File
51118	TR24-5L-35K-UL	5155	>80	15.21	3500	50	103	
51119	TR24-5L-40K-UL	5367	>80	15.21	4000	50	108	



Model 51118



Nuwave 51118

Light Distribution Curve [Unit: cd]

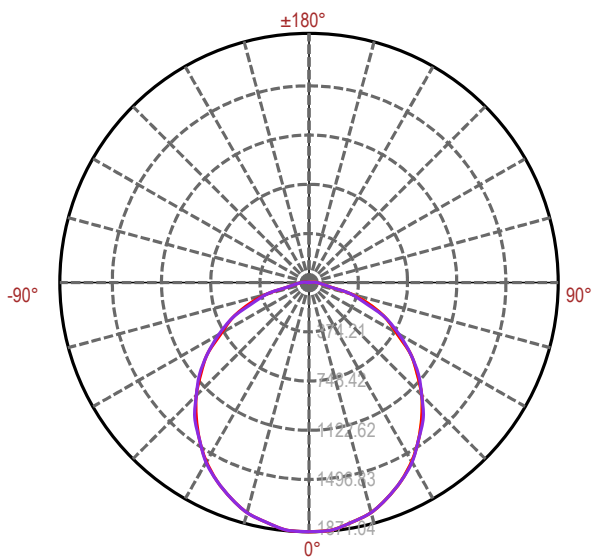

Nuwave 51118

Lux distanceCurve

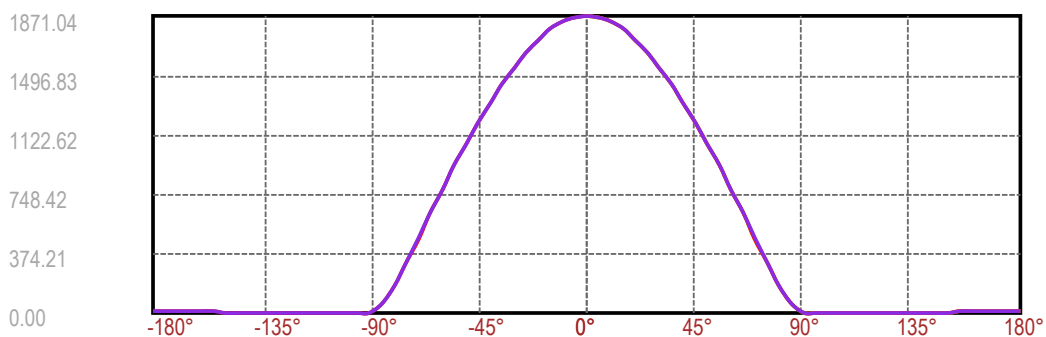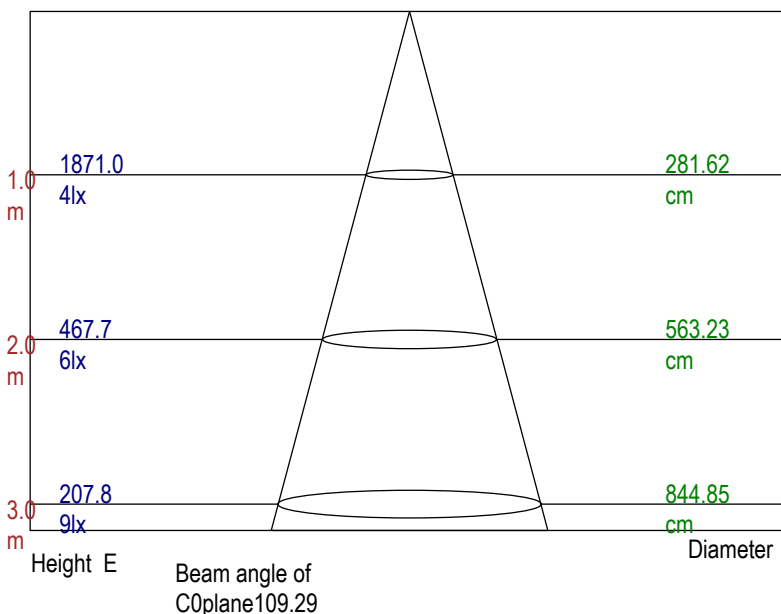

C0(Max): ———  
 C0/C180: ———  
 C90/C270: ———

Equipment: LC-I-902 GMS-2000  
 Temperature(°C): 25.0

Date: 2015-07-15  
 Humidity(%): 65.0%

Operator: HJY  
 Distance(m): 30.23




# ALSET® 2' x 4' Frosted LED Troffer

## Model 51119



Nuwave 51119

Light Distribution Curve [Unit: cd]

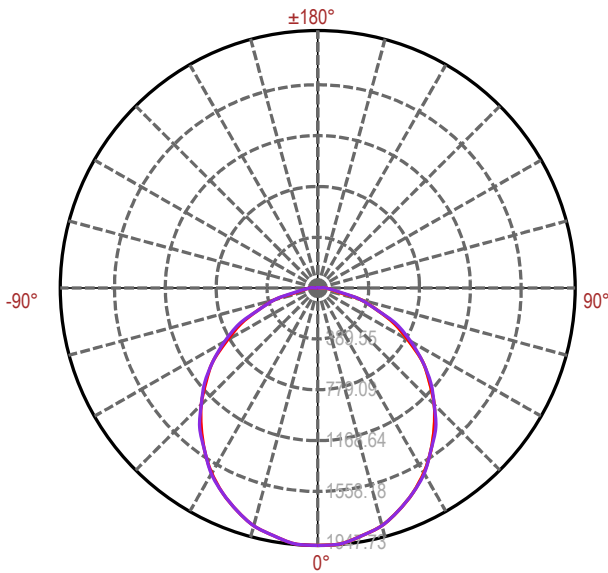

Nuwave 51119

Lux distance Curve

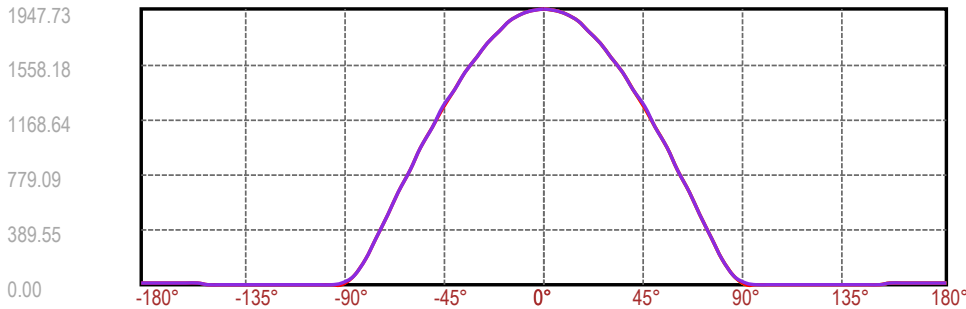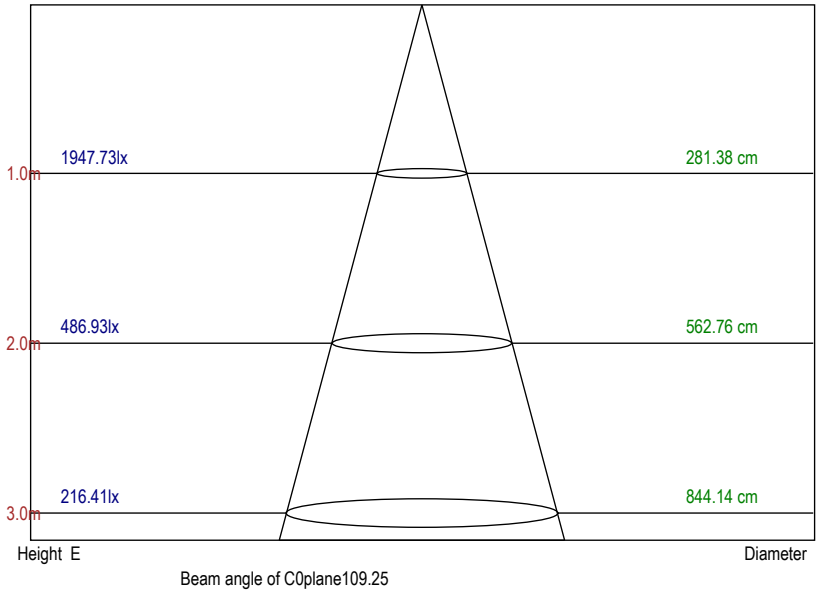


C0(Max): —  
 C0/C180: —  
 C90/C270: —

Equipment: LC-I-902 GMS-2000  
 Temperature(°C): 25.0

Date: 2015-07-14  
 Humidity(%): 65.0%

Operator: HJY  
 Distance(m): 30.23



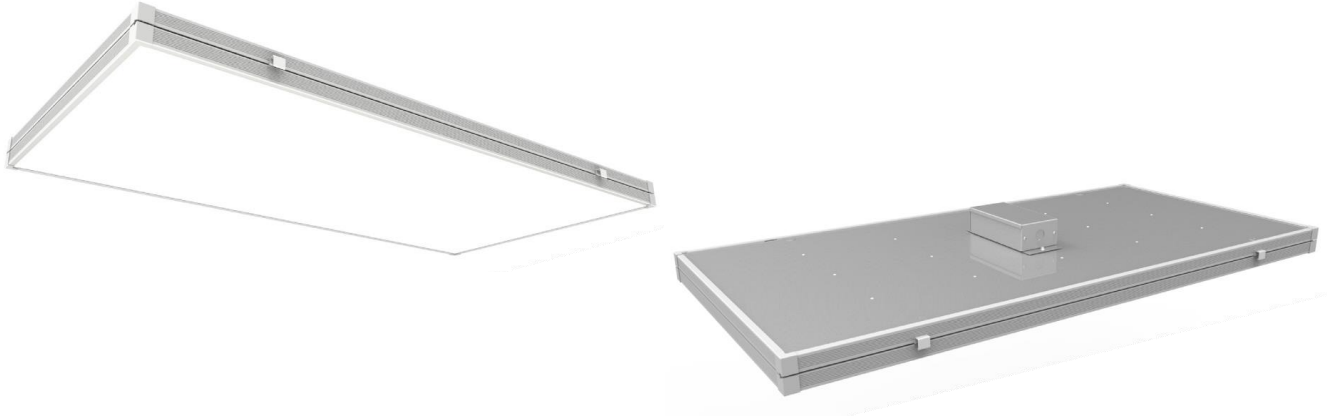

## Features

- Frosted lens to reduce glare
- Instant on to full brightness
- High efficacy at 100 lumens per watt
- Available 4000K and 5000K color temperatures
- Suitable for damp locations
- Operating temp -40°C - +60°C / -40°F - +140°F
- Superior heat management yields 60,000 hours life
- Case quantity: 2 per box
- Lower maintenance costs
- Dimensions 47.7" x 23.7" x 2.3"
- 0-10V DC dimming standard
- UL, DLC, RoHS and FCC certified
- Ultra lightweight for easy installation
- Isolated type power driver is shock and fire resistant
- 7 year warranty
- Input voltage 120-277V
- Workable Voltage 90-305V

## Applications

- Office
- Workshop
- Indoor area lighting

### Items Stocked in Illinois Warehouse

Model #	SKU Number	Lumens	CRI	Weight (lbs)	Color Temp (K)	Watts	Lumens Per Watt
51122	TR24-8L-35K-UL	8000	>80	13.4	4000	80.0	100
51123	TR24-8L-40K-UL	8000	>80	13.4	5000	80.0	100

