

***One fixture can change color temperature with the switch of a button.  
Remote required. 7 color options.***



## Features:


- Wide Beam Angle
- Built in aluminum heat sink , with 94 V0 Fire-Rated PC housing
- TC Model = IP65 rated (With PG9 connector)
- TS Model = Damp rated
- End knock out permits conduit connection on TC Model
- Input Voltage : 120 - 277 VAC
- Power : 25W - 70W
- Frequency : 50 / 60 Hz
- Lumen Efficacy : 120 lumens per watt
- Operating Temperature : -25°F - + 40°C
- Power Factor : >0.9
- Beam Angle : 270°
- CT = CCT selectable : 3000K, 3500K, 4000K, 4500K, 5000K, 6000K and 6500K
- Fixture comes with 5' mounting/hanging kit included
- DM : Dimmable Driver
- THD: <18%
- Lifespan : 50,000 hours
- Warranty : 5 years
- TS = Need Cord at Start of each continuous run
- TC = 1/2" knock out and PG9 connector included
- Remote Required (61766)

## Options :


- Cords

## Applications :


- Education / Classroom
- Healthcare
- Hospitality

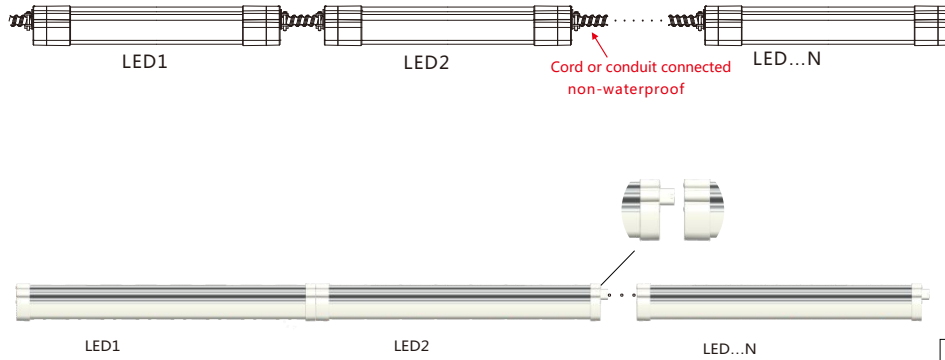

**TPAL-TC**

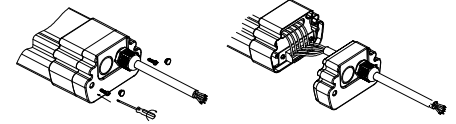

**TPAL-TS**



TS	Model#	Ref#	Lumens	Watt
24" Strip TS	TPAL24-2L-XXK-UL-DM-CT-TS	61758	2600	20
48" Strip TS	TPAL48-4L-XXK-UL-DM-CT-TS	61760	4680	36
48" Strip TS	TPAL48-5L-XXK-UL-DM-CT-TS	61762	5850	45
96" Strip TS	TPAL96-8L-XXK-UL-DM-CT-TS	61764	9100	70
TS Cord	TS Cord with special end	61331		

**Specification/Product Parameters**

- **Input voltage:** 120 - 277VAC
- **Power:** 20W-70W
- **Frequency:** 50/60Hz
- **Operating temperature:** -25° - +40° (Emergency minimum temperature -10°C)
- **Power factor:** > 0.9
- **Beam angle:** 270°
- **THD:** < 18%
- **Lifespan:** 50,000 H

Note: TPAL 96 strips (8' strips) may be subjected to additional freight charges due to oversize ratings for shipment. This MAY affect the free freight allowance on SOME orders.


TC	Model#	Ref#	Lumens	Watt
24" Strip TC	TPAL24-2L-XXK-UL-DM-CT-TC	61759	2600	20
48" Strip TC	TPAL48-4L-XXK-UL-DM-CT-TC	61761	4680	36
48" Strip TC	TPAL48-5L-XXK-UL-DM-CT-TC	61763	5850	45
96" Strip TC	TPAL96-8L-XXK-UL-DM-CT-TC	61765	9100	70
TC Cord	TC Cord w/NEMA 1-15 plug (120 V)	61311		

CT = CCT Selectable  
 TS = Tandem Seamless  
 TC = Tandem Cord/Conduit  
 DM = Dimmer

REMOTE	Model#	Ref#
REMOTE	RMCCT	61766


## Installation Instructions

### Cable Suspension

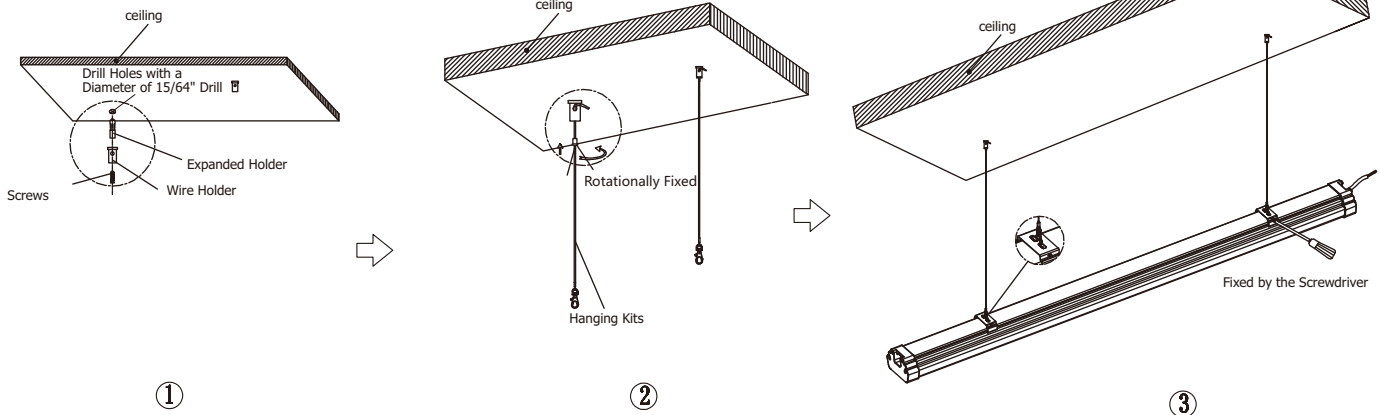


### Step (1)

### Stem Mount

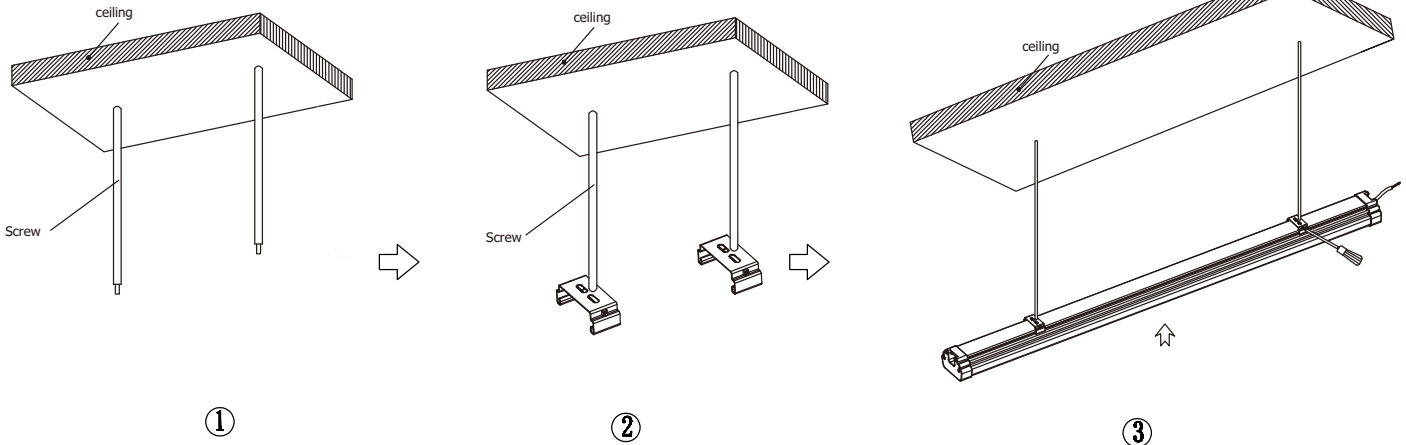

### Step (2)

### Ceiling or Wall Mount

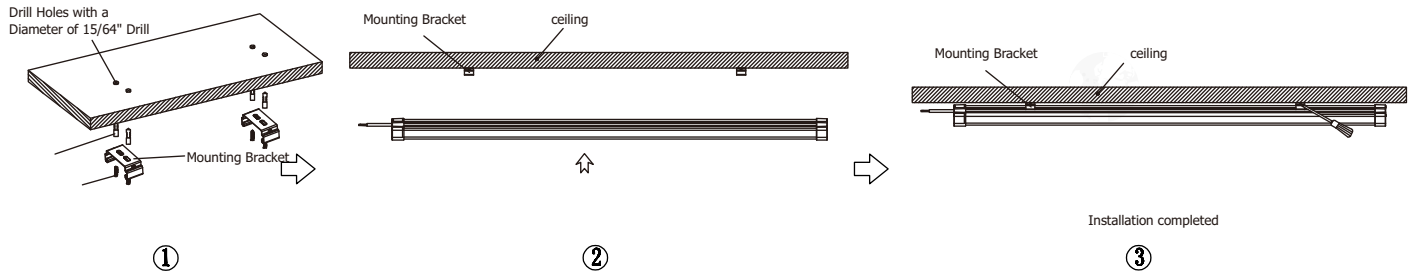

### Step (3)

## Included With Each Fixture



( Hanging Kits )



(PG 9 connector )



(connector for seamless connection)



( Mounting Bracket )

## Remote - Required



## Dimension



Type TS



Type TC

Model	L(inches)		L2 (Inches)	W (Inches)	H (Inches)
	TS	TC	TS / TC	TS / TC	TS / TC
TPAL24	23.6	25.6	21.3	3.7	2.4
TPAL48	47.2	49.2	44.9	3.7	2.4
TPAL96	94.5	96.5	92.1	3.7	2.4

Model No.	Net Weight (LBS)	Qty(pcs /CTN)	Gross Weight/CTN(LBS)	Carton Size (Inches)
TPAL24	14.55	6	17.11	L30.32*W9.06*H9.25
TPAL48	23.55	6	28.35	L53.94*W9.06*H9.25
TPAL96	47.09	6	56.70	L101.18*W9.06*H9.25