

Features


- Dark sky compliant
- Instant on to full brightness
- High efficacy at 120+ lumens per watt
- 7 year warranty
- Available 7000-14000 lumen packages
- Rated IP65
- Lower maintenance costs
- MeanWell Internal driver
- UL, DLC, RoHS and FCC certified
- Isolated type power driver is shock and fire resistant
- Workable Voltage 90-305V
- NO flickering, NO UV or IR in the beam
- Can be converted into pole mount

Applications


- Warehouse
- Sports venues
- industrial settings
- Parking areas

Reference #	Model #	Lumens	Watts	Lm/W	CCT	CRI	DLC
60567	WPSN-7L-40K-UL	7320	61	120	4000	>80	Standard
61173	WPSN-7L-50K-UL	5450	37.68	145	5000	>80	Standard
61174	WPSN-7L-57K-UL	7498	61	123	5700	>80	Standard
60568	WPSN-9L-40K-UL	10232	80	128	4000	>80	Standard
61176	WPSN-9L-50K-UL	10380	80	130	5000	>81	Standard
61177	WPSN-9L-57K-UL	10528	80	132	5700	>82	Standard
60569	WPSN-12L-40K-UL	12251	100	123	4000	>83	Standard
61179	WPSN-12L-50K-UL	12374	100	124	5000	>84	Standard
61180	WPSN-12L-57K-UL	12496	100	125	5700	>85	Standard
60570	WPSN-13L-40K-UL	14190	123	115	4000	>86	Standard
61182	WPSN-13L-50K-UL	5526	38.29	144	5000	>87	Standard
61183	WPSN-13L-57K-UL	14473	123	118	5700	>88	Standard

Photometrics:

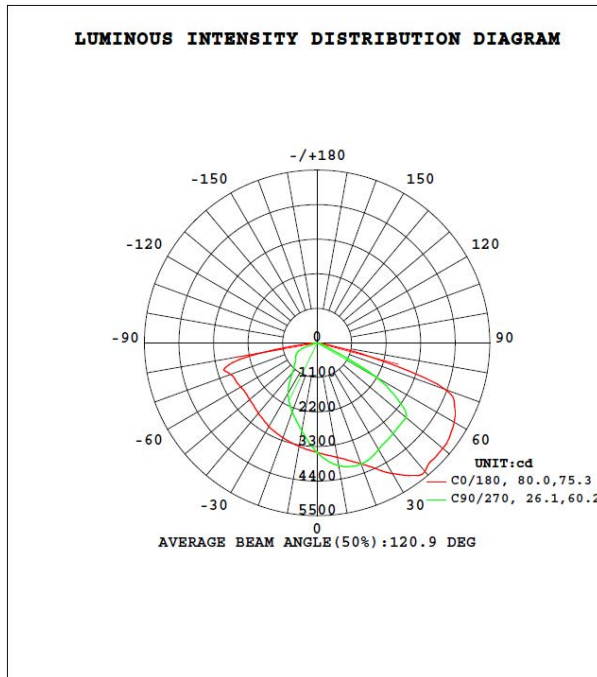

Flux out:6952 lm

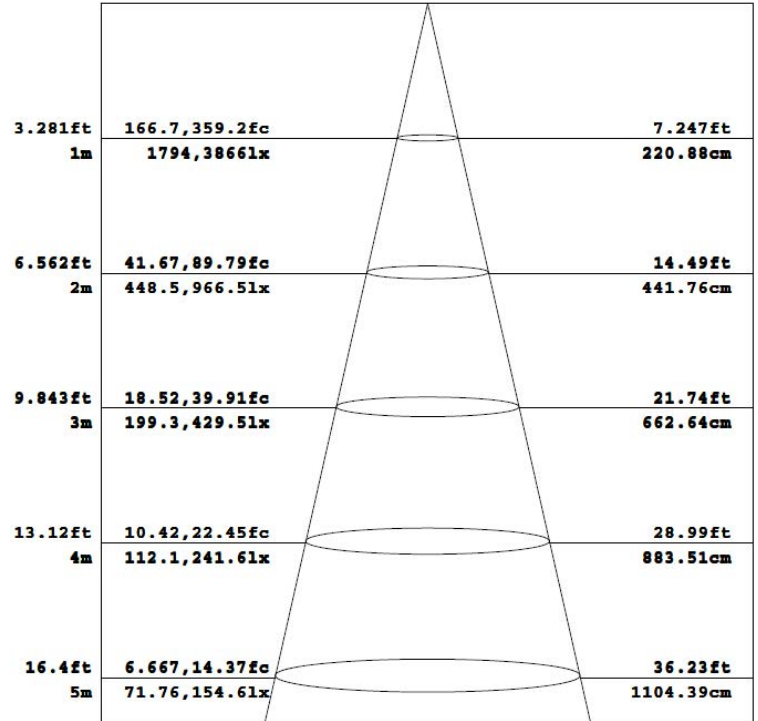

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.