

**Features**


- Frosted lens to reduce glare
- Instant on to full brightness
- High efficacy at 101-104 lumens per watt
- Available 3500K, 4000K, and 5000K color temperatures
- Suitable for damp locations
- Operating temp -40°C - +60°C / -40°F - +140°F
- Superior heat management yields 60,000 hours life
- LM79/80 reports and TM21 data available
- Lower maintenance costs
- Dimensions 23.7" x 23.7" x 4.3"

- 0-10 V DC dimming standard
- UL, DLC, RoHs and FCC certified
- Ultra lightweight for easy installation
- Isolated type power driver is shock and fire resistant
- 7 year warranty
- Input voltage 120-277V
- Workable Voltage 90-305V

**Applications**

- Office
- Workshop
- Indoor area lighting
- Warehouse
- Schools
- Healthcare facilities
- Retail stores

**Items Stocked in Illinois Warehouse**


Model#	SKU	Lumens	CRI	Weight (lbs)	Color Temp (K)	Watts	Lumens Per Watt	IES File
51012	TR22-4L-35K-UL	3609	>80	9	3500	36	101	
51013	TR22-4L-40K-UL	3787	>80	9	4000	36	104	



Model 51012



NuWave, LLC. 51012

Light Distribution Curve [Unit: cd]

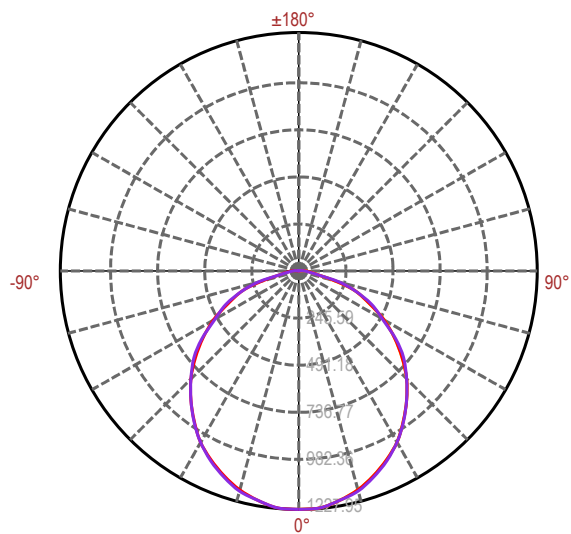

NuWave, LLC. 51012

Lux distance Curve

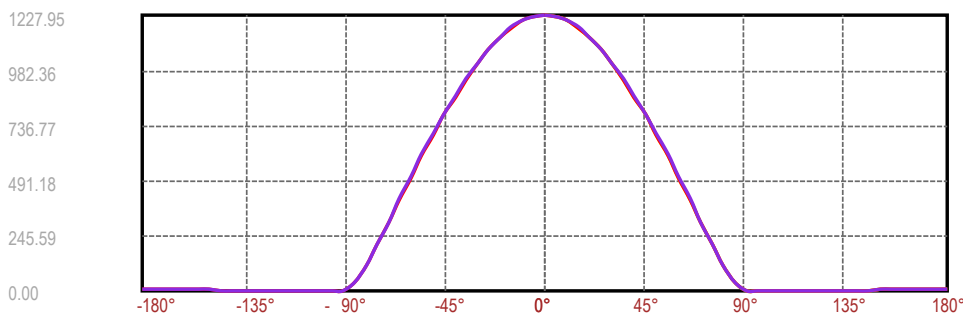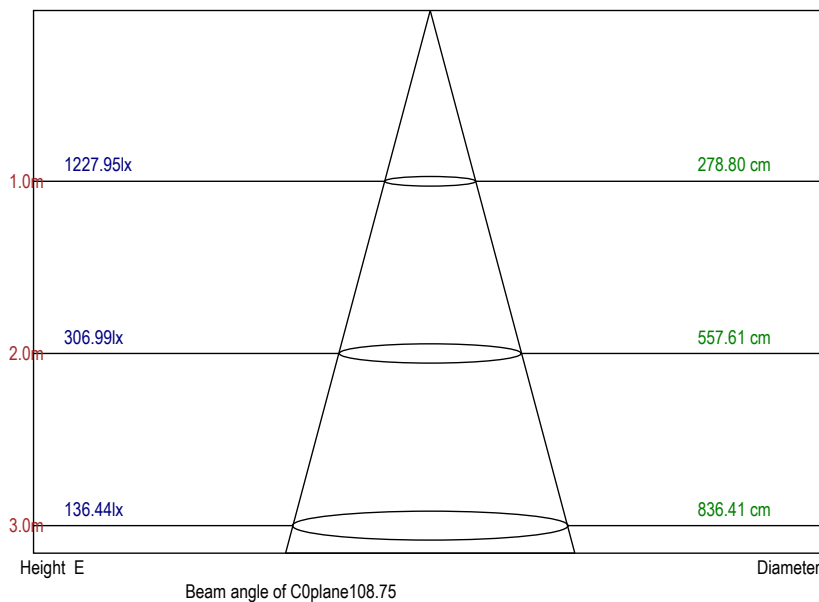

C0(Max): ———  
 C0/C180: ———  
 C90/C270: ———

Equipment: LC-I-902 GMS-2000  
 Temperature(°C): 25.0

Date: 2015-07-15  
 Humidity(%): 65.0%

Operator: HJY  
 Distance(m): 30.23




# ALSET® 2' x 2' Frosted LED Troffer

## Model 51013



Nuwave 51013

Light Distribution Curve [Unit: cd]

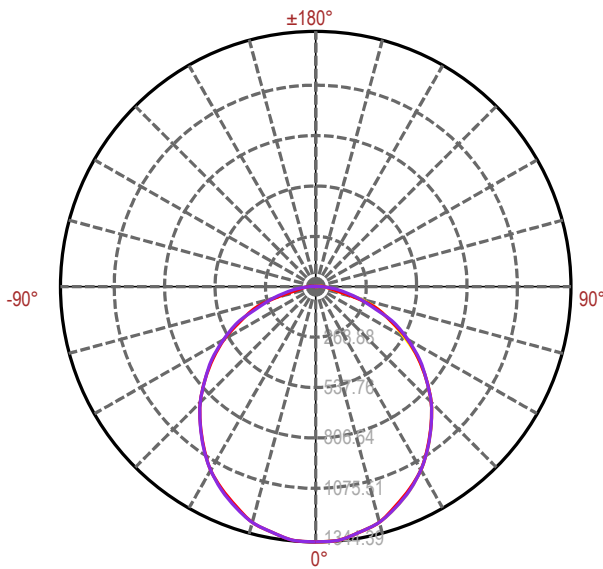

Nuwave 51013

Lux distance Curve

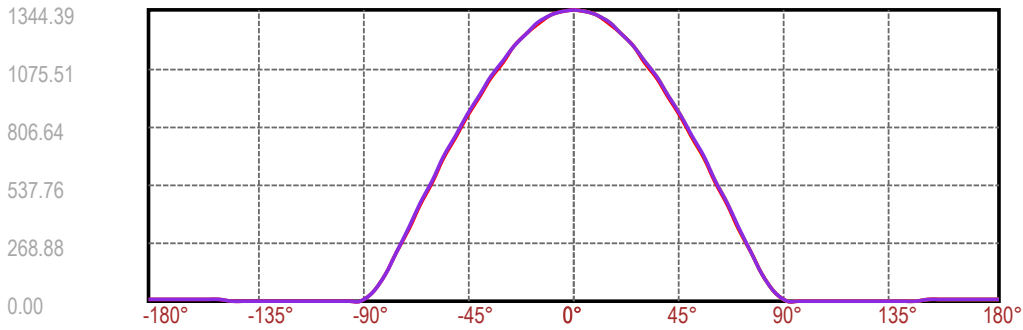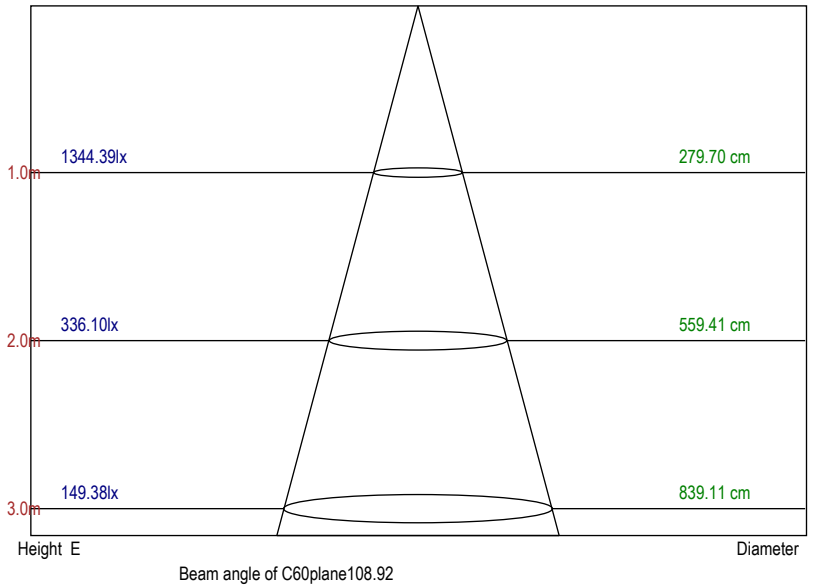

C60(Max): ———  
 C0/C180: ———  
 C90/C270: ———

Equipment: LC-I-902 GMS-2000  
Temperature(°C): 25.0

Date: 2015-07-15  
Humidity(%): 65.0%

Operator: HJY  
Distance(m): 30.23