



Features

- Frosted lens to reduce glare
- Instant on to full brightness
- Energy efficient
- Wide light distribution
- High efficacy at 116-117 lumens per watt
- Light weight for easy installation
- Lower maintenance costs
- Available 3000K, 4000k, and 5000k color temperatures
- IP65 Rated for wet locations
- Operating temp -40°C - +60°C / -40°F - +140°F
- Dimensions 18.17" x 18.17" x 3.70"
- LM79/80 reports and TM21 data available
- DLC standard under Nuwave model number 53000, 53001
- NSF certified - Splash zone / Non-Food
- Superior heat management yields 60,000 hours life
- 0-10 V DC dimming standard
- UL, DLC, RoHs and FCC certified
- 7 year warranty
- Input voltage 120-277V
- Workable Voltage 90-305V
- Title 24 compliant
- Unique mounting bracket for simple installation

Applications

- Indoor / Outdoor lighting
- Gas stations
- Warehouses
- Storage areas
- Parking garages
- Security
- Entryways & walkways
- Mechanical room
- Manufacturing plants
- Loading docks


Items Stocked in Illinois Warehouse

Model#	SKU	Lumens	CRI	Weight (lbs)	Color Temp (K)	Watts	Lumens Per Watt	Wattage Equivalent	IES File
53000	CP-11L-40K-UL	11,549	>80	13	4000	100	116	175-250 HID	
53001	CP-11L-50K-UL	11,649	>80	13	5000	100	117	175-250 HID	

Model 53000



Alset LED lighting, a product of Nuwave 53000

Light Distribution Curve [Unit: cd]

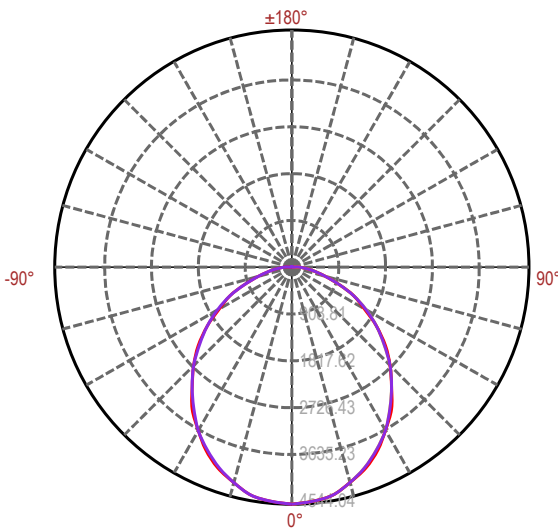

Alset LED lighting, a product of Nuwave 53000

Lux distance Curve

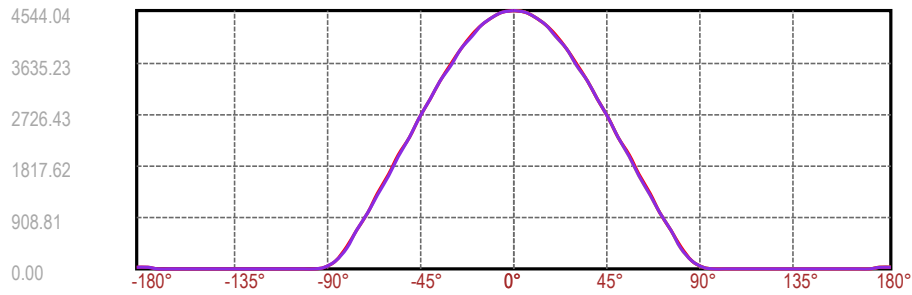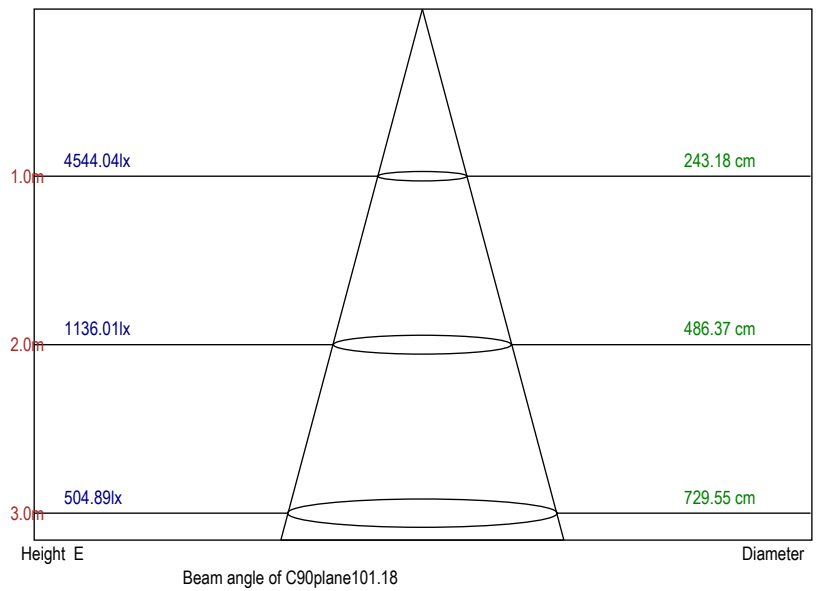

C90(Max): ——
 C0/C180: ——
 C90/C270: ——

Equipment: LC-I-902 GMS-2000
 Temperature(°C): 25.0


Date: 2015-06-30
 Humidity(%): 65.0%

Operator: HJY
 Distance(m): 29.89

Model 53001



Alset LED lighting, a product of Nuwave 53001

Light Distribution Curve [Unit: cd]

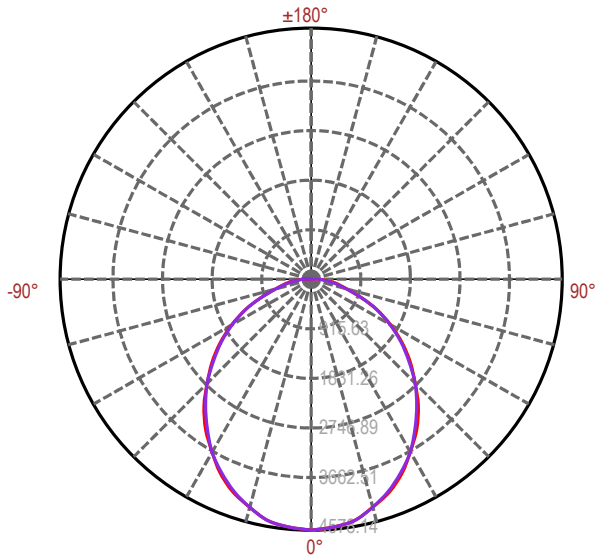

Alset LED lighting, a product of Nuwave 53001

Lux distance Curve

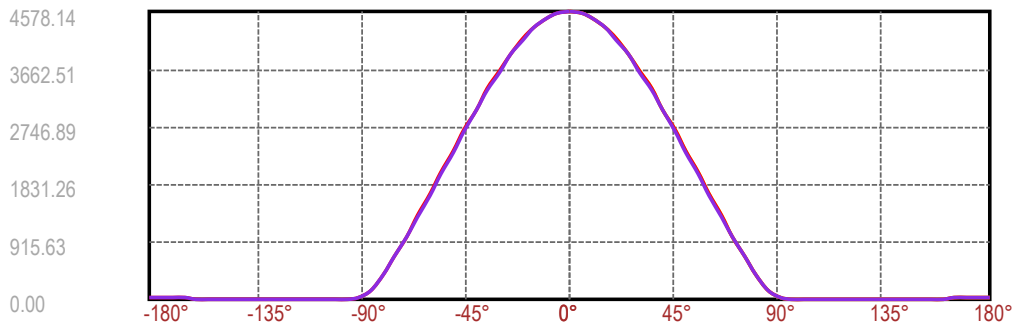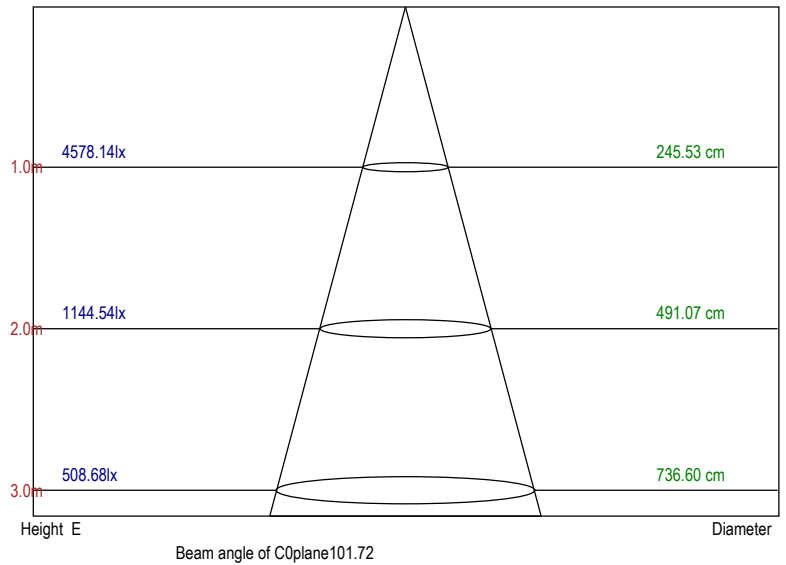

C0(Max): ———
 C0/C180: ———
 C90/C270: ———

Equipment: LC-I-902 GMS-2000
 Temperature(°C): 25.0

Date: 2015-07-07
 Humidity(%): 65.0%

Operator: HJY
 Distance(m): 29.89