



Features:



- Light Distribution Type 3 available
- Power Factor >0.99 @ 120V
- High efficacy at 100 lumens per watt
- 5-year warranty, additional options available
- 10 kV surge protector standard
- Operating Temp Range -40°-140° F / Rh 10-95%
- Fixture comes standard with 2 3/8" slip fitter knuckle mount, contact factory for other mounting options

- Net Weight 11-20lbs.
- IP66 Ingress Protection-Rated for wet locations
- Workable voltage 90-305V
- LM79/80 reports available

Applications:

- Parking Lots
- Pathways
- Roadways

Items Stocked in Illinois Warehouse

Model Number	Reference#	Lumen	CRI	Voltage	Color Temp (K)	Watts	Lumens per Watt	Wattage Equivalent	IES Files
PL-2L-40K-T3-XX-UL	54032	2,179	>70	120-277V	4000K	23	96	70W HID	
PL-4L-40K-T3-XX-UL	54033	4,470	>70	120-277V	4000K	47	94	100W HID	
PL-8L-40K-T3-XX-UL	54034	7,537	>70	120-277V	4000K	76	100	150W HID	
PL-9L-40K-T3-XX-UL	54035	9,315	>70	120-277V	4000K	98	95	175W HID	
PL-14L-40K-T3-XX-UL	54036	13,986	>70	120-277V	4000K	144	97	300W HID	
PL-20L-40K-T3-XX-UL	54037	19,639	>70	120-277V	4000K	200	98	750W HID	
PL-27L-40K-T3-XX-UL	54038	27,360	>70	120-277V	4000K	293	94	1000 W HID	



Features:

- Light Distribution Type 2-5 available
- Power Factor >0.99 @ 120V
- 10 Kv Surge Protection Standard
- High efficacy at 130 lumens per watt
- 7-year warranty, additional options available
- Operating Temp Range -40°-140° F / Rh 10-95%
- 0-10V dimming standard
- Fixture comes standard with 2 3/8" slip fitter knuckle mount, contact factory for other mounting options


- Net Weight 11-20lbs.
- IP66 Ingress Protection-Rated for wet locations
- Includes Photocell
- Workable voltage 90-305V, or 180-528V
- LM79/80 reports available

Applications:


- Parking Lots
- Pathways
- Roadways

Items Stocked in Illinois Warehouse


Model Number	Reference#	Lumen	CRI	Voltage	Color Temp (K)	Watts	Lumens per Watt	Wattage Equivalent
PLA-11L-50K-UL	54026	13,073	>70	120-277V	5000K	100	122	300W HID
PLA-16L-50K-UL	54027	16,263	>70	120-277V	5000K	128	127	400W HID
PLA-25L-50K-UL	54028	27,758	>70	120-277V	5000K	226	123	1000W HID

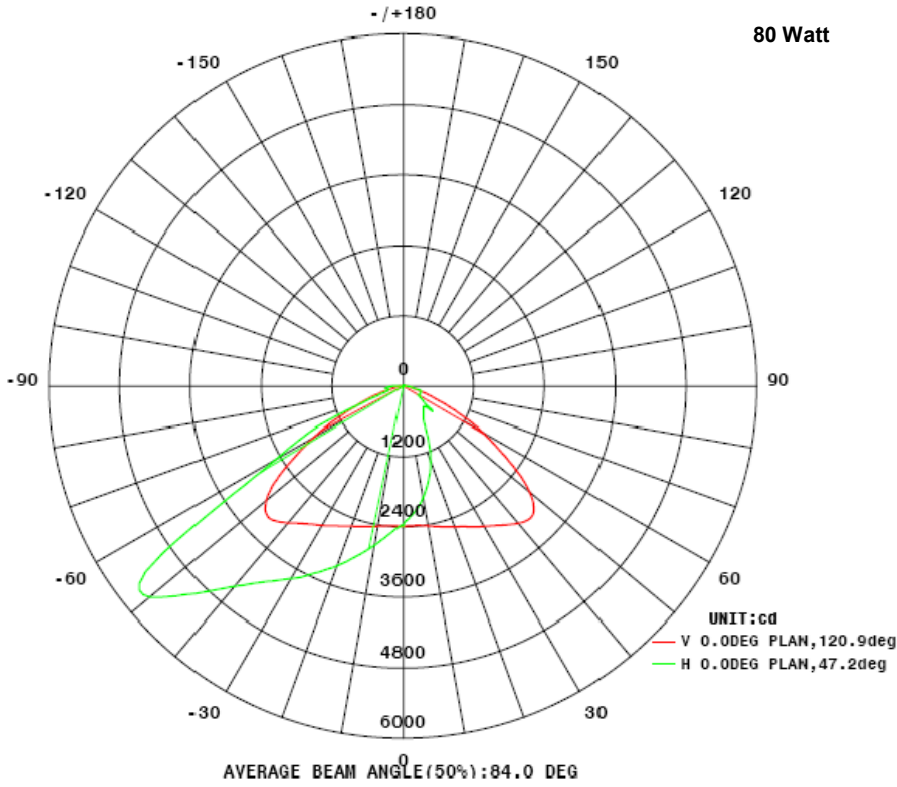


BEAM ANGLE

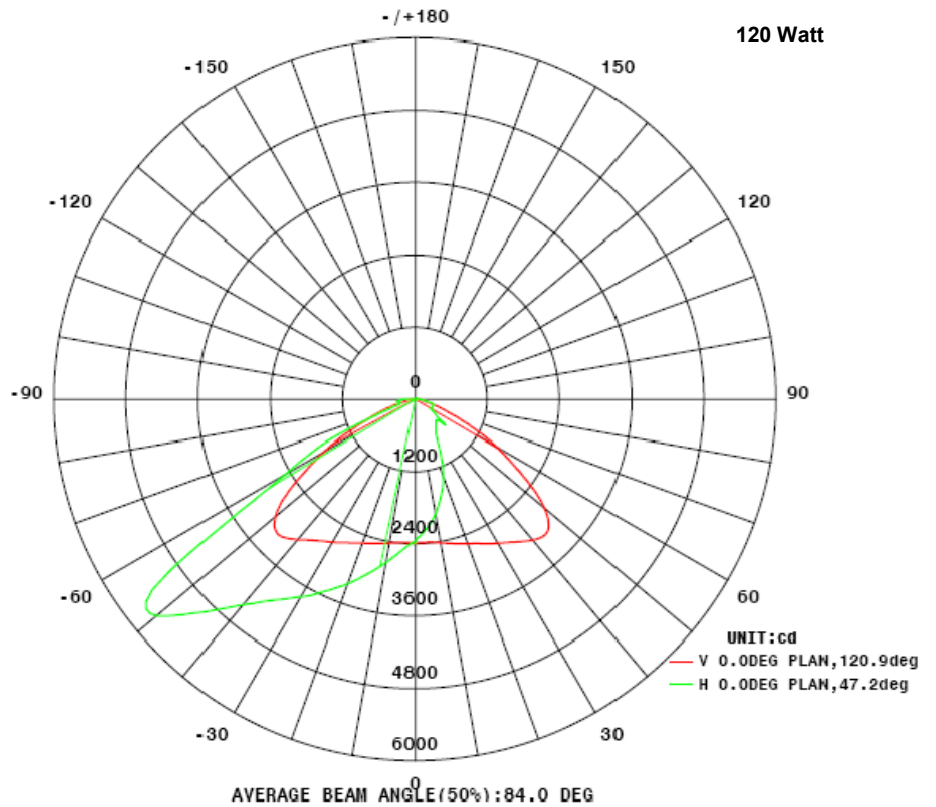

BEAM ANGLE

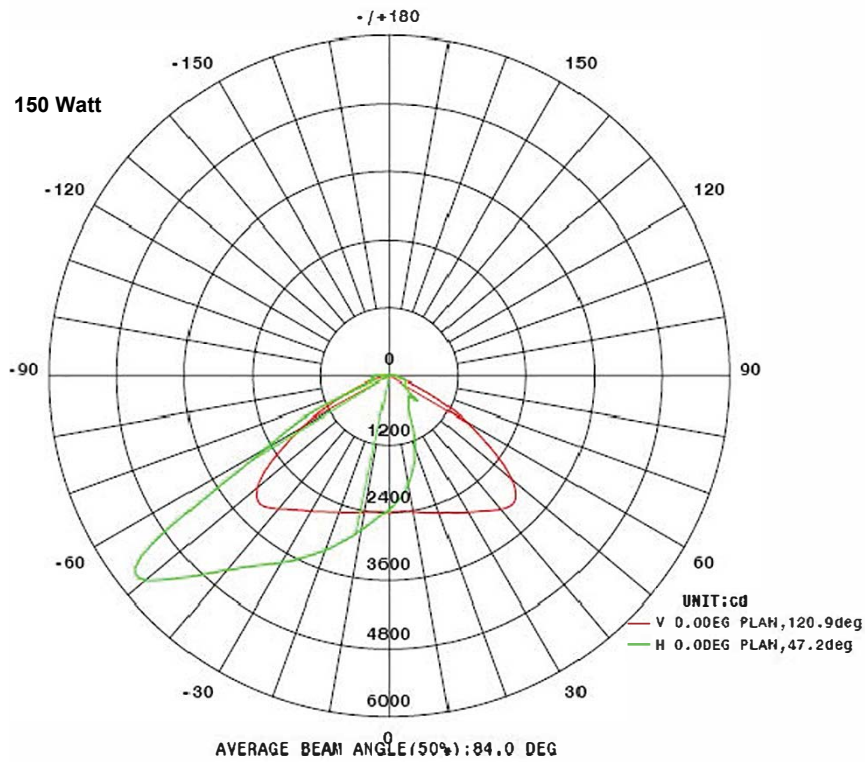


UNIT DIMENSIONS

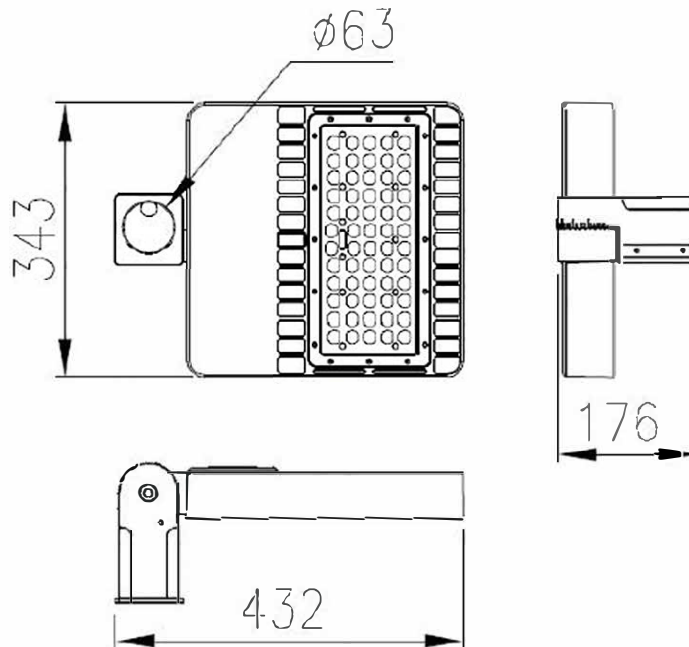


INSTALLATION INSTRUCTIONS

Type A adapter for round Pole Diameter 60MM

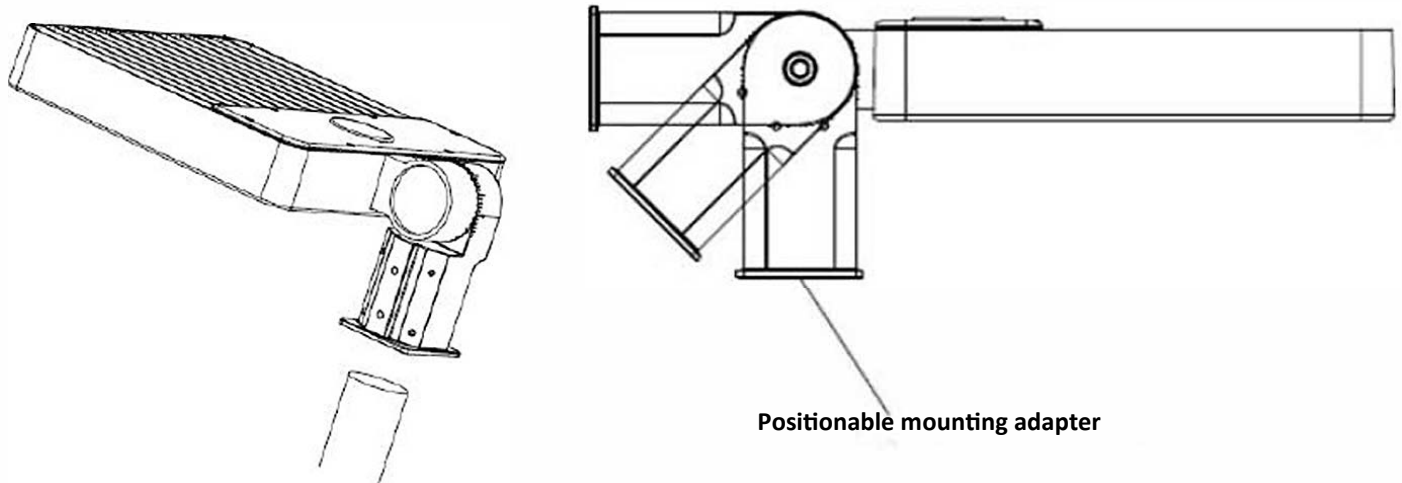

ADAPTER TYPES

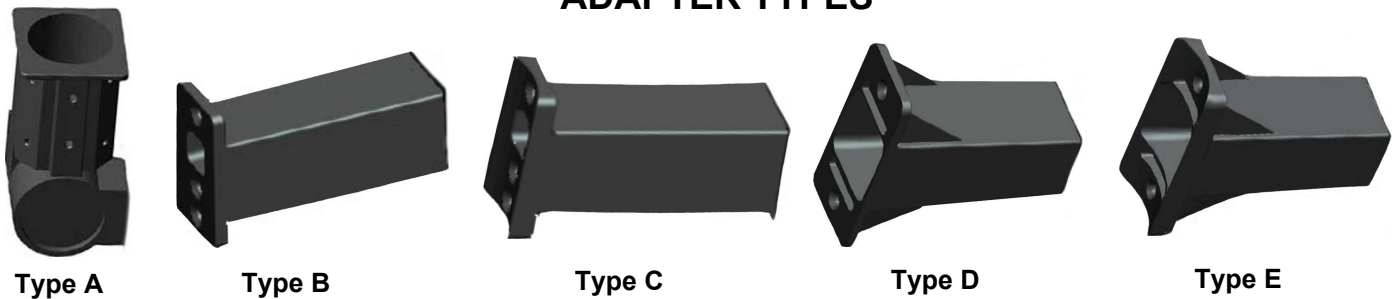

- **Improper installation may void warranty. Follow all installation instructions**
- To prevent electrical shock, cut off power before installation.
- Ensure pole can support weight of luminaire.
- Do not use where exposed to corrosive gases.
- Do not cover luminaire.
- For safe operation, luminaire must be properly grounded.