




Luminaire Schedule						
Symbol	Qty	Label	Arrangement	Total Lamp Lumen	LF	Description
⊕	15	HB-L 52000	SINGLE	17848.6	0.900	HB-18L-40K-UL

Calculation Summary						
Label	Units	Avg	Max	Min	Avg/Min	Max/Min
Cold Storage_Calc AFG	Fc	29.44	36.2	22.0	1.34	1.65


Reflectances: Ceiling .70, Walls .50, Floor .20
 Calculations taken AFG

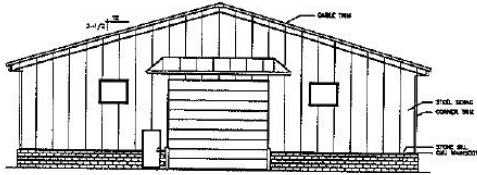

Provide storage level lighting of 25 lumens per footcandle average



HIGH BAY - LOW #52000

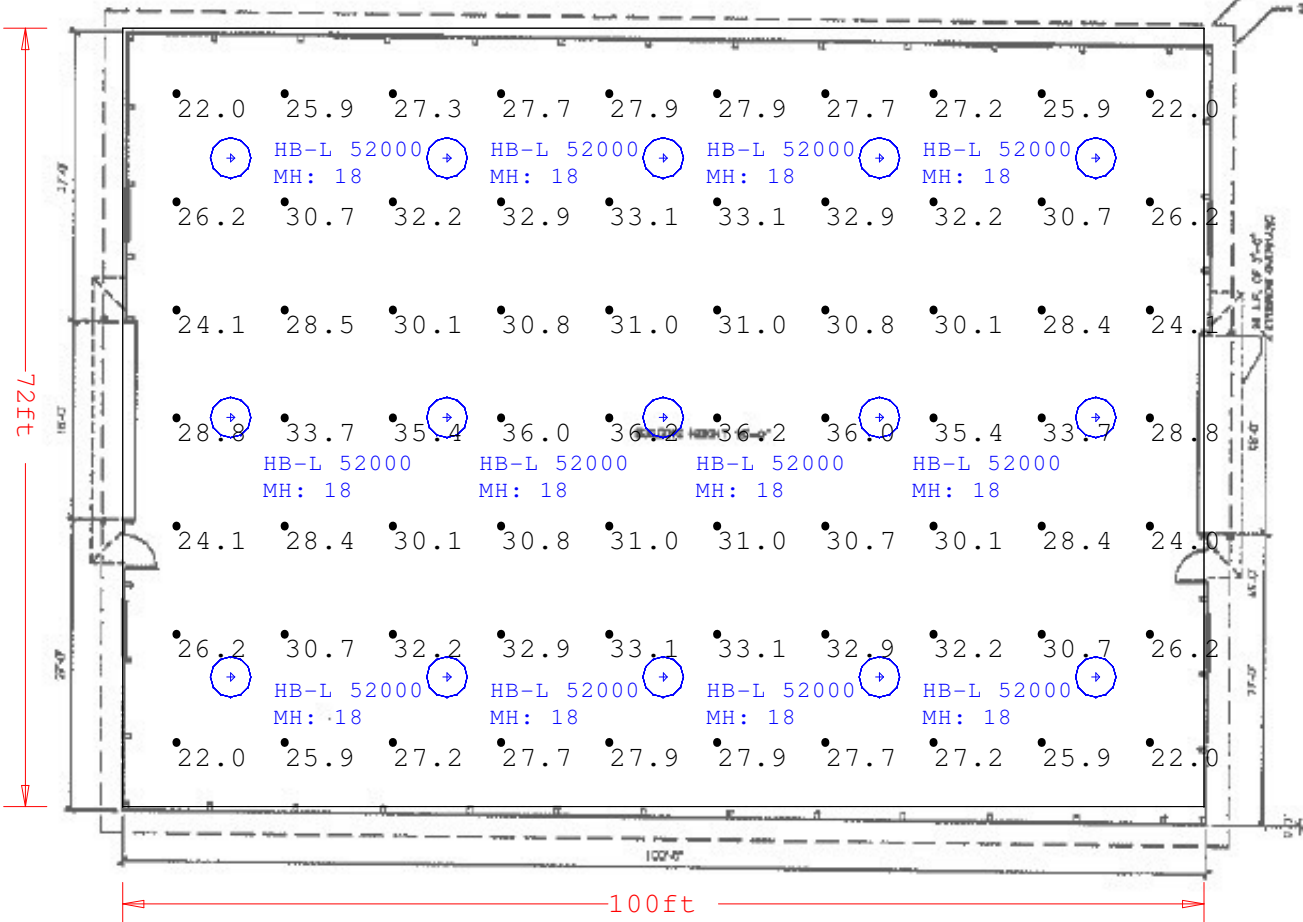

Key Features

- Frosted lens reduces glare
- Instant on to full brightness
- Wide light distribution
- High efficacy: 117-126 lumens per watt
- 60,000 hours rated life
- 0-10V DC dimming standard
- IP65 rated for wet locations
- UL, DLC, RoHS, & FCC approved
- LM79 and LM80 reports available
- Lightweight for easy installation
- Mounting Options: 3/4-inch hub for pendant mounting, suspension cables (ordered separately)
- 7 year warranty

Specifications

- Height: 5 1/2 inches
- Base Diameter: 21 3/4 inches
- Input Voltage: 120-277V or 347-480V
- Lumens: 18,000
- Watts: 144-150
- High CRI also available in >90 CRI
- Efficacy: 117-126 lumens per watt
- CCT: 4000K, 5000K (inquire for other CCT)
- Operating Temperature: -40°F - 140°F
- CRI: >80
- Power Factor: 0.99
- Beam Angle: Wide
- Lens: Frosted
- Weight: 14.5 pounds

Customer responsible to verify ordering information/catalogue number prior to placing order



Drawn By: Nick Harms
Checked By: NAH
Date: 4/6/2017
