


ALSET® LED Frosted Highbay/Lowbay Fixture

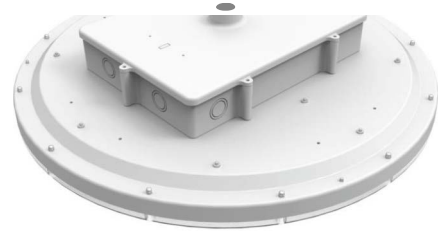

Features

- Frosted lens to reduce glare
- Instant on to full brightness
- CRI >80
- Wide light distribution
- High efficacy up to 142 lumens per watt
- Light weight for easy installation
- Stocked in 4000K and 5000K color temperatures. Also available in 3000K and 3500K
- Operating temp -40°C - +60°C
-40°F - +140°F
- IP65 Rated for wet locations
- Dimensions 21.6" x 21.6" x 5.20"
- Superior heat management yields 60,000 hours life
- 0-10 V DC dimming standard
- UL, DLC Premium 5.1, RoHS and FCC certified
- NSF Certified- Splash Zone/ Non-Food Zone
- 7 year warranty
- Workable Voltage at 90-305V, or 312-528V
- Input voltage 120/277V or 347/480V

Applications

- Retail stores
- Malls
- Parking garages
- Food Processing
- Agriculture
- Car wash

Available Options

- Occupancy Sensor/ Daylight harvesting
- Battery Backup
- Cord and Plug
- Griplock suspension system

Items Stocked in Illinois Warehouse

Ref #	Model Number	Lumens	CRI	Color Temp (K)	Watts	Lumens per Watt	Wattage Equivalent
60532	LB-8L-35K-UL	9,490	>80	3500K	73.15	129.74	210.42 HID
60531	LB-8L-30K-UL	9,366	>80	3000K	73	128	210.42 HID
61780	LB-8L-50K-UL-MW	9,659	>80	5000K	74	135	250/320 HID
62172	LB-8L-40K-UL-SS	10,051	>80	4000K	72.8	138.02	254.04 HID
62173	LB-8L-50K-UL-SS	10,301	>80	5000K	72.1	142.87	254.04 HID
60534	LB-11L-30K-UL	12,615	>80	3000K	100	126	228 HID
61784	LB-11L-40K-UL-MW	13,815	>80	4000K	98.9	139.67	286.38 HID
61785	LB-11L-50K-UL-MW	14,298	>80	5000K	98.9	144.56	286.38 HID
62176	LB-11L-40K-UL-SS	13,815	>80	4000K	98.9	139.67	286.38 HID
62177	LB-11L-50K-UL-SS	14,298	>80	5000K	98.9	144.56	286.38 HID

*NOT DLC

*NOT DLC

*NOT DLC