



Alset LED Paddle Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. These lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies. Installation is very simple by bypassing existing ballast

Features:

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- Easy installation
- Reduced maintenance costs
- Lamp base rotates up to 270° to allow for proper aiming for the lamp
- The use of an external surge protection device is recommended
- Operating temperature range between -4°F and 113°F (-20°C and 45°C). Suitable for use in dry and damp environments
- Do not use where exposed to water or outdoors without an appropriate enclosed fixture

Applications:

- Area lighting
- Flood Lighting





Product Performance:

54W LED Retrofit Lamp		115W LED Retrofit Lamp	
Input Power (W)	54	Input Power (W)	115
Bare Lamp Lumens	6500	Bare Lamp Lumens	13500
DLC Rated Lumens	5140	DLC Rated Lumens	10860
Lumens/Watt (Bare Lamp)	120	Lumens/Watt (Bare Lamp)	117
Orientation	Horizontal	Orientation	Horizontal
Correlated Color Temperature (CCT)	5000K	Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	70	Color Rendering Index (CRI)	70
Life Hours	50000	Life Hours	50000
Distribution	Type V	Distribution	Type V
Dimming	No	Dimming	No
Operating Temperature Range	-4°F and 113°F (-20°C and 45°C)	Operating Temperature Range	-4°F and 113°F (-20°C and 45°C)

Dimension:

54W LED Paddle Retrofit Lamp

115W LED Paddle Retrofit Lamp

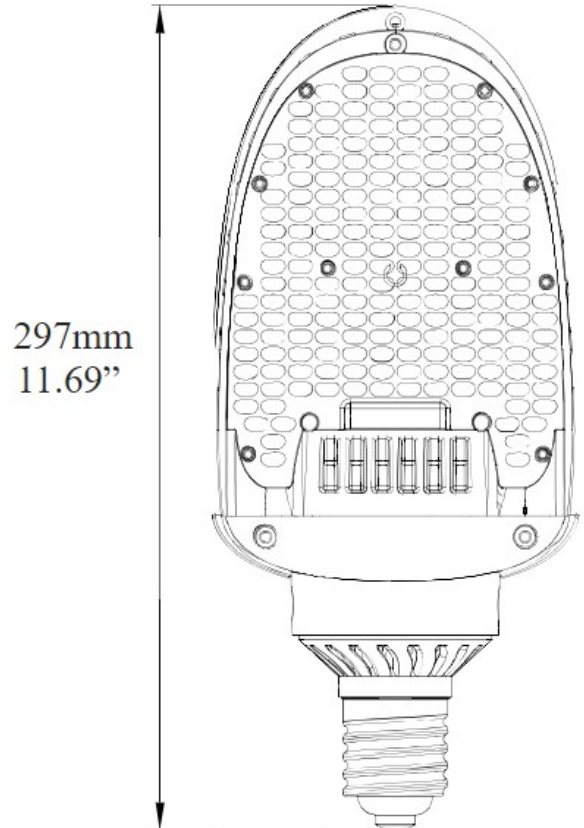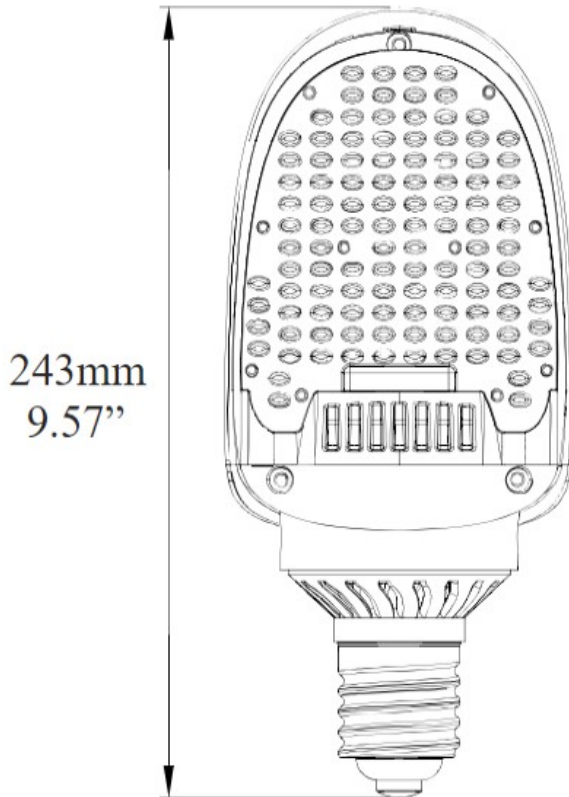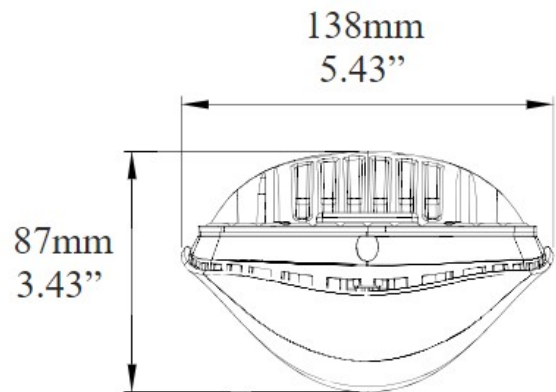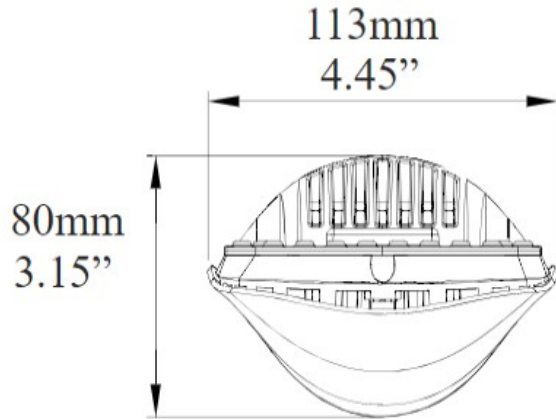

Items Stocked in Illinois Warehouse

Model Number	Reference #	Lumens	Color Temp (K)	Watts	Lm/W	Wattage Equivalent
PAD-54W-40K-UL	62131	5,010	4000K	53.01	94.51	250W HID
PAD-115W-40K-UL	62133	10,642	4000K	113.6	93.68	250W HID
PAD-54W-50K-UL	62132	5,142	5000K	53.43	96.24	400W HID
PAD-115W-50K-UL	62133	10,642	5000K	113.6	93.68	400W HID